

TP8

series




Product Segments

- **Care Motion**


Transformer type	SMPS
Input voltage	100~240V AC
Maximum output	29V DC, 2.5A
Plug support	EU, USA, AUS, UK
Color	Black or grey
IP rating	up to IP66
Certificate	CB, ES/EN60601-1, and IEC60601-1 compliant
Wall mount design	

Drawing

Dimensions with EU Plug
(mm)

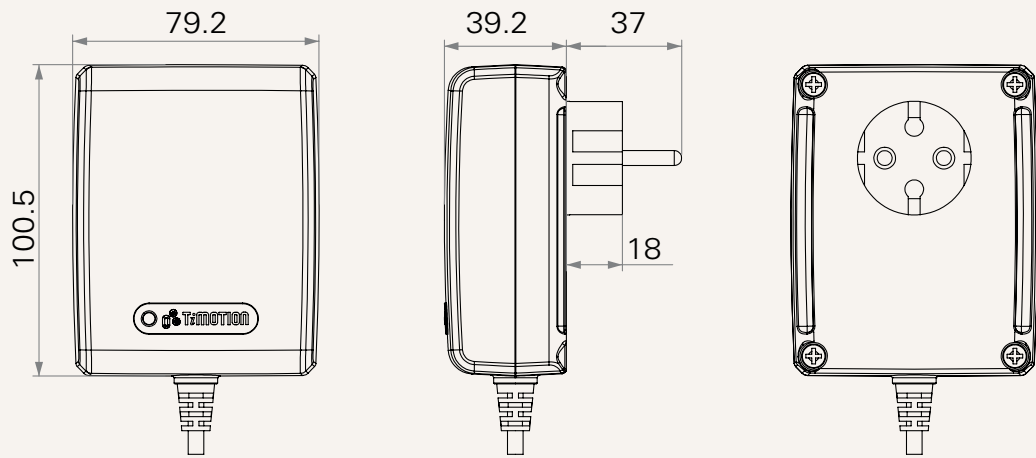


Dimensions with USA Plug
(mm)

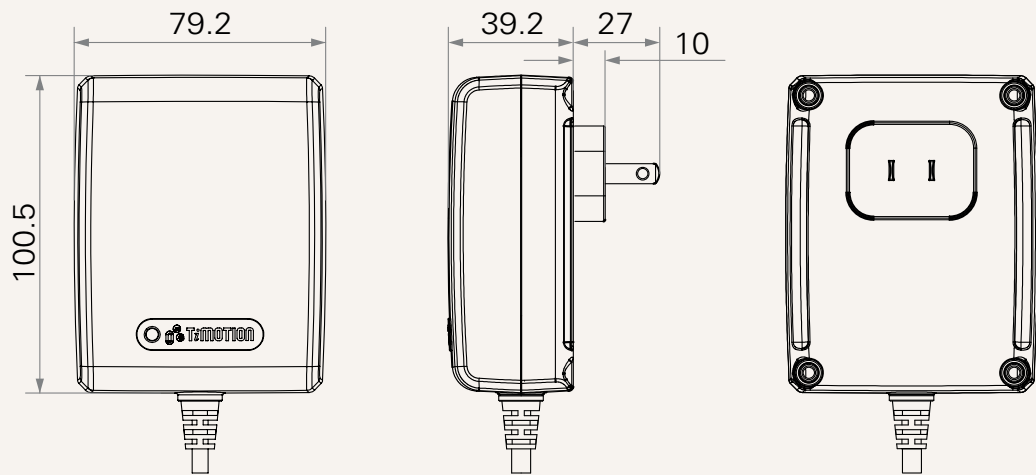


Drawing

Dimensions with AUS Plug
(mm)

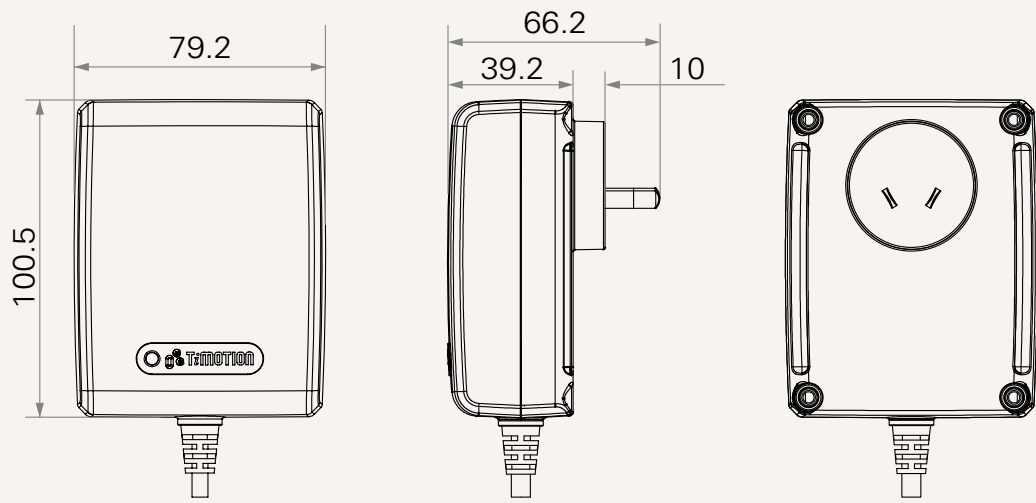

Dimensions with UK Plug
(mm)

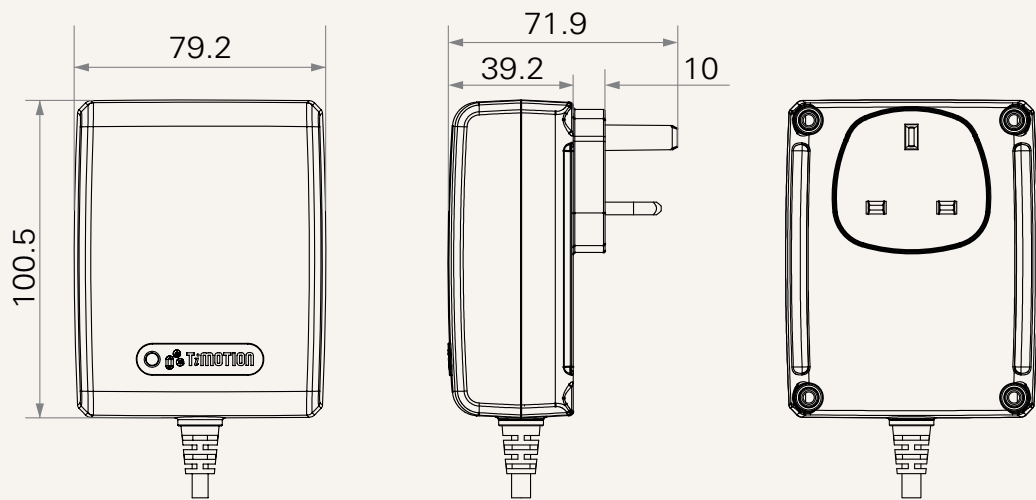

Plug	1 = EU	3 = AUS
	2 = USA	4 = UK
Color	1 = Black	2 = Grey (Pantone 428C)
Cable Length and Connector	1 = Straight, 2000mm; DIN 5pin socket	4 = Straight, 4000mm; small 01pin socket
	2 = Straight, 2000mm; small 01pin socket	5 = Curly , 1450mm (curly part: 250mm); DIN 5pin socket
	3 = Straight, 4000mm; DIN 5pin socket	6 = Curly , 1450mm (curly part: 250mm); small 01pin socket
IP Rating	1 = Without	2 = IP54
		3 = IP66

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.